

## TECHNICAL INFORMATION

# SAFELUX 200LM 3.8W

## PERMANENTE / NÃO PERMANENTE

Armadura de emergência de linhas direitas equipada para uso de telecomando e pode ser convertida em bandeira. Está equipada com proteção IP65, 200 Lumens e bateria com duração de 3 horas.


Straight Desing emergency batten equipped to use with remote control and can be converted into a Edge-lit exit. It is equipped with IP65 protection, 200 Lumens and a battery lasting 3 hours.

Luminaria de emergencia equipada para uso con control remoto y convertible placa de señalización. Está equipado con protección IP65, 200 lúmenes y una batería de 3 horas de duración.



### ILEM-00049

REFERENCE	
POWER	3.8W
CCT	4000K
TOTAL LUMINOUS FLUX	200lm
BATTERIES	3.6V 1500mAh NI-MH
LIFE TIME BATTERIES	800 cycle of charging and discharging
LIFE TIME	50000H
LED LIFE TIME	100000H
VOLTAGE	220-240/50-60Hz
IP	IP65
OUTPUT VOLTAGE	5V ±0.5V
OUTPUT POWER	3.8W
CHARGING TIME	24H
DISCHARGING TIME	3H
SELF TEST	YES
SIZE	268.5x120x36.2mm
MAX CHANGE CURRENT(MA)	MAX 200mA
MAX DISCHARGE CURRENT(MA)	MAX 500mA
LED TYPE	SMD2835 21PCS
PROTECTION CLASS	Class II
ON/OFF CYCLES	-
PROTECION CLASS IK (SHOCK RESISTENCE)	IK06
LED BRAND	-
DRIVER BRAND	-
MOUNTING TYPE	Recessed / Surface
BODY MATERIAL	Polycarbonate Diffuser & ABS Housing
COLOR	White
BODY SHAPE	Rectangular
BOX QUANTITY	1 pc / carton
GROSS WEIGHT	-
CERTIFICATION	NP EN 60598-2-22
NP	NP EN 6049-2-22

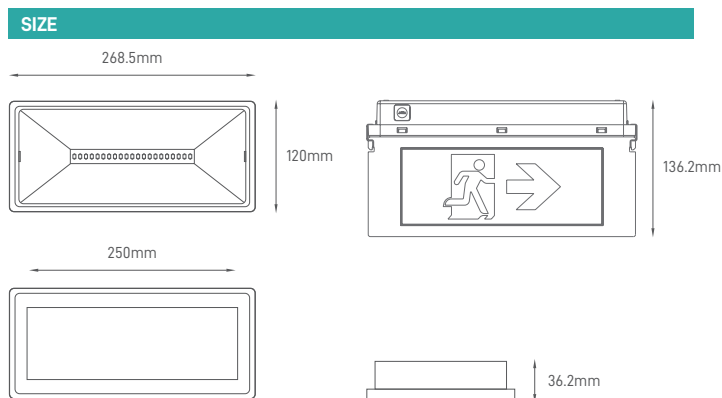

### RECOMMENDED ACCESSORIES



DESCRIPTION	SKU
Bandeira Acrílica Edge-lit exit Placa de Señalización 267x100x10mm	<b>ILEM-00035</b>